


RET Rubfastness tester single- and twin-station

(3059/1, RET 3059/2)

according to DIN EN ISO 11 640 (formerly DIN 53 339).

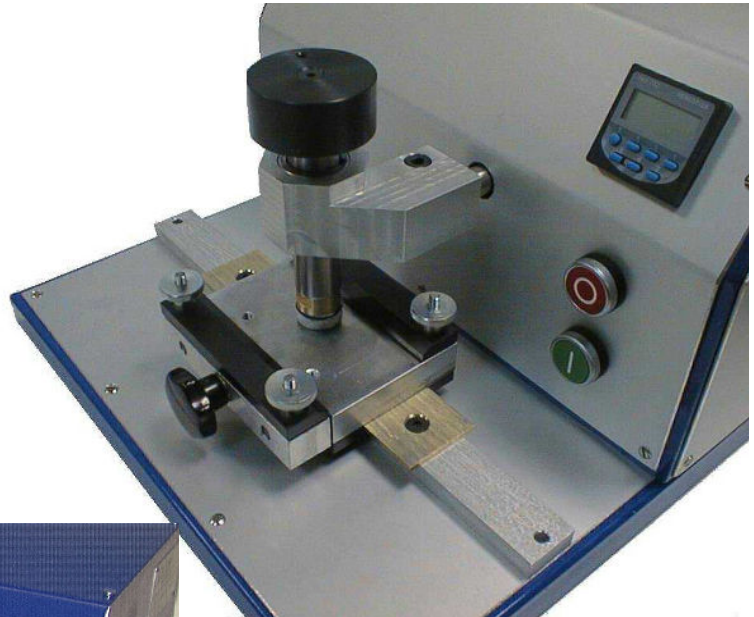

RET Rub Fastness Tester

The test machine makes possible the judgement of resistance of colouring and finishing of leather and textile materials opposite to rubbing strain of surface. This check is particularly important to the testing of rubbing fastness of shoe linings and backs of upper leather of shoes without lining.

Dimensions:

Desktop model with a floor space of approximately 600 x 350 mm

Electric supply: 230 V AC, 50 Hz.